



CCTV

Solaris speed  
dome cameras –  
reliable and  
accurate






## Security that can be used anywhere

The Solaris™ range of speed dome cameras boasts high precision, speed, reliability and, not least of all, perfect image sharpness. With the optimum quality of images representing a high degree of security, Solaris is suitable both for internal and external use in areas such as town and city centres, airports, retail, commercial buildings and even motorways. The new Solaris CCDS1415-DNX high-speed dome features a day-night camera with a 26x optical zoom and high sensitivity to extremely low light conditions, which enable it to monitor wide-area scenes and detect the smallest detail.

Large variety of accessories for flexible installation – corner, wall, pendant, swan neck or flush mounting to fit every environment.

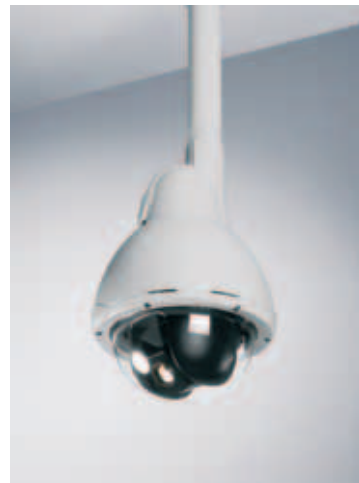

# Speed dome cameras with an optical zoom of up to 26x

## ■ Straightforward installation

It is very easy to install and maintain the Solaris dome range, due to the split construction of the camera head unit (HU) and the external termination unit (XTU). The Solaris dome is factory-sealed, i.e. it never has to be opened. The power supply and all terminals for video, telemetry data, alarm and supply cables for the dome camera are reliably protected in the weatherproof and tamperproof housing of the XTU. An external RJ45 connection with an included pre-fitted 10m CAT5 cable simply links the dome head unit with the XTU – with just one cable for power, video and telemetry. Once the dome has been installed, all programming is done directly at the XTU, which can be installed up to 30m away from the dome head unit, for example at the base of a pole or in a control room. This eliminates the need for ladders, expensive scaffolding or platforms for setup and programming. Using the optional local power supply (RTU) the distance can be extended to up to 300m. Installing the XTUs in a control room also saves time while configuring or performing routine servicing, instead of having to visit each camera separately.

## ■ User-friendly configuration via LCD display on the XTU

Menu-guided addressing, protocol selection and settings for inspection and testing are performed via an LCD display on the XTU. Also, setting of presets or diagnostics and even checking the video image and signal quality can be performed on this LCD, so a portable monitor is not required.

## ■ Solaris sees more than others

Available with either a 26x or an 18x optical zoom lens, with both options delivering excellent low light performance. An auto-flip function has also been added, enabling the camera to track moving targets as they pass beneath the dome.

## ■ Backup / Restore functionality

Should the need arise to replace the camera head due to deliberate or accidental damage, this can be easily done, without the need to manually reprogramme all settings – configuration settings from the camera head can be backed-up and stored within the XTU. This reduces down-time on site if a camera head is damaged.

## ■ Optimized image quality 24 hours a day

The new Solaris CCDS1415-DNX high-speed dome features a day-night camera with a 26x optical zoom and high sensitivity to extremely low light conditions. The infrared cut filter enables the camera to provide crisp colour images during the day and infrared sensitive monochrome images in the dark. The integrated 26x zoom facilitates both the monitoring of wide-area scenes as well as the detection of the smallest detail.

## ■ Privacy zones masking

24 privacy zones are programmable with up to 8 displayed on screen at all times.

## ■ Pattern recording

Solaris also offers enhanced pattern recording with up to four programmable patterns supported. Each pattern tracks and records the camera's manual movement, including zoom and focus, for a period of time determined by the operator. This can then be replayed either continuously or can be manually recalled. The possibility to define zone names makes it easier to know which camera/zone is being displayed.

	CCDS1415-ST	CCDS1415-DN	CCDS1415-DNX
CCD size	1/4"	1/4"	1/4"
TV lines	480	480	480
Resolution	High resolution	High resolution	High resolution
Type	Colour	Day-Night	Day-Night
Zoom optical / digital	18x / 12x	18x / 12x	26x / 12x
Total zoom	216x	216x	312x
Minimum illumination	0.05 Lux (F1.4)	0.05 Lux (colour); 0.01 Lux (mono)	0.05 Lux (colour); 0.01 Lux (mono)
Lens focal length	4.1 ~ 73.8 mm	4.1 ~ 73.8 mm	2.5 ~ 91 mm
S/N ratio	> 50 dB	> 50 dB	> 50 dB
Mechanical IR cut filter		■	■
Pan-tilt speed	0.2 ~ 360°/s	0.2 ~ 360°/s	0.2 ~ 360°/s
Presets	max. 99 (depending on protocol)	max. 99 (depending on protocol)	max. 99 (depending on protocol)
Tours	32 positions	32 positions	32 positions
Privacy zones	24	24	24
Alarm inputs XTU	7 + 1x tamper	7 + 1x tamper	7 + 1x tamper
Alarm output XTU	1	1	1
Power	110 ~ 230 VAC via XTU	110 ~ 230 VAC via XTU	110 ~ 230 VAC via XTU

# Welcome to the world of innovative thinking

## ■ Innovation

Siemens invests a great deal in both manpower and research and development. This results in a steady stream of new insights, technologies and inventions that enable us to improve the reliability of our products and systems, ensuring the securest products and making our systems even more simple and convenient to operate.

Advances in digital technologies are creating a whole new world of possibilities. Siemens is at the leading edge of progress in this field and continues to redefine both current and future technologies.

## ■ Reliability

With a history of over a hundred years, if you need an established, reliable partner you are in the very best of hands with Siemens. System expansions and upgrades can be continuously made over a period of years, which ensures your investment for the future.

## ■ Security

Siemens products and systems provide you with security. Today, tomorrow and for decades to come. That's why countless customers around the world place their trust in Siemens.



Siemens Switzerland Ltd  
Building Technologies Group  
International Headquarters  
Gubelstrasse 22  
6301 Zug  
Switzerland  
Tel +41 41 724 24 24  
Fax +41 41 724 35 22

Siemens Building Technologies  
A Division of Siemens Ltd (Australia)  
885 Mountain Hwy  
Bayswater, VIC, 3153  
Australia  
Tel +61 3 9721 2000  
Fax +61 3 9720 9966

Siemens Limited  
Building Technologies  
Units 1006-10  
10/F, China Resources Building  
26 Harbour Road  
Wanchai  
Hong Kong  
Tel +852 2870 7888  
Fax +852 2407 4457

Siemens Pte Limited  
Building Technologies  
The Siemens Center  
60 MacPherson Road  
348615  
Singapore  
Tel +65 6490 6000  
Fax +65 6490 6001

Siemens Building Technologies  
Security Products Limited  
Brecon House  
Llantarnam Park  
Cwmbran  
NP44 3AB  
United Kingdom  
Tel +44 871 386 0800  
Fax +44 871 386 0888

The information in this document contains general descriptions of technical options available, which do not always have to be present in individual cases. The required features should therefore be specified in each individual case at the time of closing the contract.

Subject to change • Order no. A24205-A336-B260 • © Siemens Switzerland Ltd